

LDO10C SERIES

Single Output

10 A current rating

Input voltage range 3.0-13.8 V

Adjustable output voltage: 0.59-5.1 V

- Optional 3-pin model factory set
- Optional 5-pin model factory set with power good option

Excellent transient response

Power enable (5-pin model)

Minimum airflow

Small package

Termination voltage capacity

RoHS Compliant

The LDO10C is a new high density, open frame, non-isolated converter for space sensitive applications. This model has a wide input range of 3-13.8 V and offers a 0.59-5.1 V adjustable output with 10 A capability. Typical efficiency for this model is 91% (12 V_{in}, 2.5 V_{out}, 10 A load). The 5-pin version of this voltage device offers the additional features of enable, and with a default wide adjustable out voltage range or option of power good.

[2 YEAR WARRANTY]




EMERSON[™]
 Network Power

Stresses in excess of the maximum ratings can cause permanent damage to the device. Operation of the device is not implied at these or any other conditions in excess of those given in the specification. Exposure to absolute maximum ratings can adversely affect device reliability.

Absolute Maximum Ratings

Characteristic	Symbol	Min	Typ	Max	Units	Notes and Conditions
Input voltage - continuous	$V_{in} (cont)$	3.0		13.8	Vdc	$V_{in}(+) - V_{in}(-)$
Enable	$V_{En} (max)$			3.3 5.0	V V	When $V_{in} < 5 V$ When $V_{in} > 5 V$
Pgood Voltage	$V_{Pgood} (max)$			3.3 5.0	V V	When $V_{in} < 5 V$ When $V_{in} > 5 V$
Operating temperature	T_{op}	-40		85	°C	Measured at thermal reference points, See Note 1. See Derating curves
Storage temperature	$T_{storage}$	-40		125	°C	
Output current	$I_{out} (max)$			10	A	

All specifications are typical at nominal input $V_{in} = 5 V$ and $12 V$, full load under any resistive load combination at $25^{\circ}C$, unless otherwise stated.

Input Characteristics

Characteristic	Symbol	Min	Typ	Max	Units	Notes and Conditions
Input voltage - operating	V_{in}	3.0		13.8	Vdc	
Input current - no load	I_{in}		80		mA	$V_{in} (min) - V_{in} (max)$, enabled
Input current - quiescent	$I_{in(off)}$		10		mA	Converter disabled
Input voltage variation	dv/dt		1.0		V/ms	Product was tested at $1.2 V/ms$. Much higher dv/dt is possible ($>10 V/ms$)

Turn On/Off

Characteristic	Symbol	Min	Typ	Max	Units	Notes and Conditions
Input voltage - turn on	$V_{in} (on)$		2.8		Vdc	See App Note 186 to adjust this point
Input voltage - turn off	$V_{in} (off)$		2.5		Vdc	
Turn on delay - enabled, then power applied	$T_{delay} (power)$		2	3	ms	With the Remote ON/OFF signal asserted, this is the time from when the input voltage reaches the minimum specified operating voltage until V_{out} is in regulation
Turn on delay - power applied, then Remote ON/OFF asserted	$T_{delay} (Remote ON/OFF)$		2	3	ms	$V_{in} = V_{in(on)}$, then Remote ON/OFF asserted. This is the time taken until V_{out} is in regulation
Rise time	T_{rise}		1.3	2	ms	from 10% to 90%; full resistive load, $0 \mu F$ capacitance

Signal Electrical Interface

Characteristic - Signal Name	Symbol	Min	Typ	Max	Units	Notes and Conditions
Remote ON/OFF Control pin open circuit voltage 3.3 V 5 V 12 V	V_{ih}		0.61 0.92 2.2		Vdc	See Application Note 186 $I_{ih} = 0 \mu A$; open circuit voltage See Notes 2 and 3
High level input current	I_{ih}		1		μA	Current flowing into control pin when pin is pulled high (max. at $V_{ih} = 5 V$)
High level input voltage	V_{ih}	.502			Vdc	Converter guaranteed on when control pin is greater than V_{ih} (min)
Low level input voltage	V_{il}			0.202	Vdc	Converter guaranteed off when control pin is less than V_{il} (max)
Low level input current 3.3 V 5 V 12 V	I_{il} (max)		110 166 398		μA	$V_{il} = 0 Vdc$

Reliability and Service Life

Characteristic	Symbol	Min	Typ	Max	Units	Notes and Conditions
Mean time between failure	MTBF				Hours	MIL-HDBK-217F $V_{in} = V_{in} (nom)$; $I_{out} = I_{out} (max)$; ambient 25 °C; ground benign environment
Mean time between failure	MTBF	8,220,210			Hours	Telcordia SR-332 Issue 2, ground benign, ambient 40 °C, $V_{in} = V_{in} (nom)$ - $I_{out} = I_{out} (max)$

Other Specifications

Characteristic	Symbol	Min	Typ	Max	Units	Notes and Conditions
Switching frequency	F_{sw}		620		kHz	Fixed frequency
Weight			1.899/0.067		g/oz.	

Environmental Specifications

Type	Parameter	Reference	Test Level	Notes and Conditions
Air temperature operating	-40 °C to 85 °C			Max. rate of change is 30 degrees per hour while operating and 20 degrees per hour while non-operating
Air temperature non-operating	-40 °C to 125 °C			
Relative humidity - operating	80%			With non-condensing Excluding rain during parts shipment
Relative humidity - non-operating	100%			
Vibration - operating				Sinusoidal vibration, 0.5 G (0 to peak) acceleration.
Vibration - non-operating				Sinusoidal vibration, 1.0 G (0 to peak)
Shock	Accerlation			40 G, square wave at 200 in/s (508 cm/s); on all six sides
Non-operating square wave				
Non-operating half sine				
Operating half sine				Half sine pulse for 40 in/s (102 cm/s) for 2 ms; on all sides except top

Safety Agency Approvals

Characteristic	
UL/cUL	UL/cUL60950
TÜV Product Service	IEC 60950

Material Ratings

Characteristic Signal Name	Notes and Conditions
Flammability rating	UL94V-0
Material type	FR4 PCB

Model Numbers

Model Number	Input Voltage	Output Voltage	Output Current (Max.)	Efficiency at Full Load	Max. Load Regulation
LDO10C-005W05-SXJ*	3.0-13.8 V	0.59-5.1 V	10 A	92%	±0.5%
LDO10C-005W05-HXJ*	3.0-13.8 V	0.59-5.1 V	10 A	92%	±0.5%
LDO10C-005W05-VXJ*	3.0-13.8 V	0.59-5.1 V	10 A	92%	±0.5%

X = Custom Option

RoHS Compliance Ordering Information



The 'J' at the end of the part number indicates that the part is Pb-free (RoHS 6/6 compliant). TSE RoHS 5/6 (non PB-free) compliant versions may be available on special request, please contact your local sales representative for details.

3.3 V, 5 V, 12 V Model 0.9 V Setpoint

Input Characteristics

Characteristic	Symbol	Min	Typ	Max	Units	Notes and Conditions
Input current - operating (Source) (3.3 V)	I_{in}		3.47		A _{dc}	$V_{in} = V_{in} (nom)$; $I_{out} = I_{out} (max)$
(Sink) (3.3 V)	I_{in}		-2.00		A _{dc}	
(Source) (5 V)	I_{in}		2.24		A _{dc}	
(Sink) (5 V)	I_{in}		-1.35		A _{dc}	
(Source) (12 V)	I_{in}		0.98		A _{dc}	
(Sink) (12 V)	I_{in}		-0.55		A _{dc}	
Input capacitance - internal filter	C_{input}		22		μF	
Input capacitance - external filter	C_{bypass}		1		μF	Recommended customer added capacitance

3.3 V, 5 V, 12 V Model 0.9 V Setpoint

Electrical Characteristics - O/P

Characteristic	Symbol	Min	Typ	Max	Units	Notes and Conditions
Nominal set-point voltage	$V_o (nom)$	0.891	0.9	0.909	V _{dc}	$V_{in} = V_{in} (nom)$; $I_{out} = I_{out} (nom)$
Line regulation				±0.2	%	$I_{out} = I_{out} (nom)$; $V_{in} (min)$ to $V_{in} (max)$
Load regulation				±0.5	%	$V_{in} = V_{in} (nom)$; $I_{out} (min)$ to $I_{out} (max)$
Output current - continuous	I_{out}	0		10.0	A _{dc}	Minus indicates sink mode
Output current - short circuit	I_{sc}		20.6		A _{pk}	Continuous, unit auto recovers
Output voltage - noise (3.3 V) 0.9 V	V_{p-p}			15	mV pk-pk	See Application Note 186 for more information
(5.0 V) 0.9 V	V_{p-p}			15	mV pk-pk	
(12 V) 0.9 V	V_{p-p}			25	mV pk-pk	
						Measurement band width 20 MHz See Application Note 186 for details

3.3 V, 5 V, 12 V Model 0.9 V Setpoint

Electrical Characteristics - O/P

Characteristic	Symbol	Min	Typ	Max	Units	Notes and Conditions
Load transient response - peak deviation	$V_{dynamic}$		100	100	mV	Peak deviation for 50% to 100% step load, $di/dt = 10 A/\mu s$
Load transient response - recovery	$T_{recovery}$			20	μs	Settling time to within 1% of output set-point voltage for 50% to 75% step load
External load capacitance (3.3 V)	C_{ext}		0	8400	μF	See Application Note 186 for output capacitance vs. stability

3.3 V, 5 V, 12 V Model 0.9 V Setpoint

Protection and Control Features

Characteristic	Symbol	Min	Typ	Max	Units	Notes and Conditions
Overcurrent limit inception	I_{oc}		17		Adc	$V_o = 90\%$ of V_o (nom)

3.3 V, 5 V, 12 V Model 0.9 V Setpoint

Efficiency

Characteristic	Symbol	Min	Typ	Max	Units	Notes and Conditions
Efficiency 3.3 V (source mode) 3.3 V (sink mode)	η	76	78 74		%	$I_{out} = 100\%$ (max) $V_{in} - V_{in}$ (nom)
Efficiency 5.0 V (source mode) 5.0 V (sink mode)	η	78	80 75		%	
Efficiency 12 V (source mode) 12 V (sink mode)	η	74	76 72		%	
Efficiency 3.3 V (source mode) 3.3 V (sink mode)	η	84	86 82		%	$I_{out} = 50\%$ (max) $V_{in} - V_{in}$ (nom)
Efficiency 5.0 V (source mode) 5.0 V (sink mode)	η	84	86 82		%	
Efficiency 12 V (source mode) 12 V (sink mode)	η	78	80 73		%	

3.3 V, 5 V, 12 V Model 2.5 V Setpoint

Input Characteristics

Characteristic	Symbol	Min	Typ	Max	Units	Notes and Conditions
Input current - operating (Source) (3.3 V)	I_{in}		8.27		A _{dc}	$V_{in} = V_{in} (nom)$; $I_{out} = I_{out} (max)$; $V_o = V_o (nom)$
(Sink) (3.3 V)	I_{in}		-6.62		A _{dc}	
(Source) (5 V)	I_{in}		5.48		A _{dc}	
(Sink) (5 V)	I_{in}		-4.39		A _{dc}	
(Source) (12 V)	I_{in}		2.34		A _{dc}	
(Sink) (12 V)	I_{in}		-1.84		A _{dc}	
Input capacitance - internal filter	C_{input}		22		μF	Internal to converter
Input capacitance - external filter	C_{bypass}		1		μF	Recommended customer added capacitance

3.3 V, 5 V, 12 V Model 2.5 V Setpoint

Electrical Characteristics - O/P

Characteristic	Symbol	Min	Typ	Max	Units	Notes and Conditions
Nominal set-point voltage	$V_o (nom)$	2.475	2.500	2.525	V _{dc}	$V_{in} = V_{in} (nom)$; $I_{out} = I_{out} (nom)$
Line regulation				±0.2	%	$I_{out} = I_{out} (nom)$; $V_{in} (min)$ to $V_{in} (max)$
Load regulation				±0.5	%	$V_{in} = V_{in} (nom)$; $I_{out} (min)$ to $I_{out} (max)$
Output current - continuous	I_{out}	0		10.0	A _{dc}	
Output current - short circuit	I_{sc}		20.6		A _{pk}	Continuous, unit auto recovers from short
Output voltage - noise V_{rms} (3.3 V) 2.5 V	V_{p-p}			15	mV pk-pk	Measurement band width 20 MHz See Application Note 186 for details
(5.0 V) 2.5 V	V_{p-p}			20	mV pk-pk	
(12 V) 2.5 V	V_{p-p}			30	mV pk-pk	

3.3 V, 5 V, 12 V Model 2.5 V Setpoint

Electrical Characteristics - O/P

Characteristic	Symbol	Min	Typ	Max	Units	Notes and Conditions
Load transient response - peak deviation	$V_{dynamic}$		140		mV	Peak deviation for 50% to 100% step load, $di/dt = 10 A/\mu s$
Load transient response - recover	$T_{recovery}$		20		μs	Settling time to within 1% of output set point voltage for 50% to 75% step load
External load capacitance	C_{ext}		0	2300	μF	See Application Notes 186 for output capacitance values vs. stability

3.3 V, 5 V, 12 V Model 2.5 V Setpoint

Protection and Control Features

Characteristic	Symbol	Min	Typ	Max	Units	Notes and Conditions
Overcurrent limit inception	I_{oc}		16		A _{dc}	$V_o = 90\%$ of V_o (nom)

3.3 V, 5 V, 12 V Model 2.5 V Setpoint

Efficiency

Characteristic	Symbol	Min	Typ	Max	Units	Notes and Conditions
Efficiency 3.3 V (source mode) 3.3 V (sink mode)	□	84	91 89		%	$I_{out} = 100\%$ (max) $V_{in} - V_{in}$ (nom)
Efficiency 5.0 V (source mode) 5.0 V (sink mode)	□	89	91 88		%	
Efficiency 12 V (source mode) 12 V (sink mode)	□	87	89 93		%	
Efficiency 3.3 V (source mode) 3.3 V (sink mode)	□	93	95 92		%	$I_{out} = 50\%$ (max) $V_{in} - V_{in}$ (nom)
Efficiency 5.0 V (source mode) 5.0 V (sink mode)	□	92	94 91		%	
Efficiency 12 V (source mode) 12 V (sink mode)	□	88	90 84		%	

12 V Model 5 V Setpoint

Input Characteristics

Characteristic	Symbol	Min	Typ	Max	Units	Notes and Conditions
Input current - operating			4.48			$V_{in} = V_{in} (nom)$; $I_{out} = I_{out} (max)$; $V_o = V_o (nom)$
Input capacitance - internal filter	C_{input}		22		μF	Internal to converter
Input capacitance - external filter	C_{bypass}		1		μF	Recommended customer added capacitance

12 V Model 5 V Setpoint

Electrical Characteristics - O/P

Characteristic	Symbol	Min	Typ	Max	Units	Notes and Conditions
Nominal set-point voltage	$V_o (nom)$	4.95	5.00	5.05	Vdc	$V_{in} = V_{in} (nom)$; $I_{out} = I_{out} (nom)$
Line regulation				± 0.2	%	$I_{out} = I_{out} (nom)$; $V_{in} (min)$ to $V_{in} (max)$
Load regulation				± 0.5	%	$V_{in} = V_{in} (nom)$; $I_{out} (min)$ to $I_{out} (max)$
Output current - continuous	I_{out}	0		10.0	Adc	
Output current - short circuit	I_{sc}		20.6		Apk	Continuous, unit auto recovers from short
Output voltage - noise Vrms	V_{p-p}		45		mV pk-pk	Measurement band width 20 MHz See Application Note 186 for details

12 V Model 5 V Setpoint

Electrical Characteristics - O/P

Characteristic	Symbol	Min	Typ	Max	Units	Notes and Conditions
Load transient response - peak deviation	$V_{dynamic}$		100		mV	Peak deviation for 50% to 100% step load, $di/dt = 10 A/s$
Load transient response - recover	$T_{recovery}$		10		μs	Settling time to within 1% of output set point voltage for 50% to 75% step load
External load capacitance	C_{ext}		0	1100	μF	See Application Notes 186 for output capacitance values vs. stability

**12 V Model
5 V Setpoint**
**Protection and Control
Features**

Characteristic	Symbol	Min	Typ	Max	Units	Notes and Conditions
Overcurrent limit inception	I_{oc}		14.5		Adc	$V_o = 90\%$ of V_o (nom)

**12 V Model
5 V Setpoint**
Efficiency

Characteristic	Symbol	Min	Typ	Max	Units	Notes and Conditions
Efficiency (source)	η	91	93		%	$\eta_{opt} = 100\%$ I_{out} (max), $V_{in} = V_{in}$ (nom)
Efficiency (source)	η	92	94		%	$I_{out} = 50\%$ I_{out} (max), $V_{in} = V_{in}$ (nom)



0.9 V Setpoint

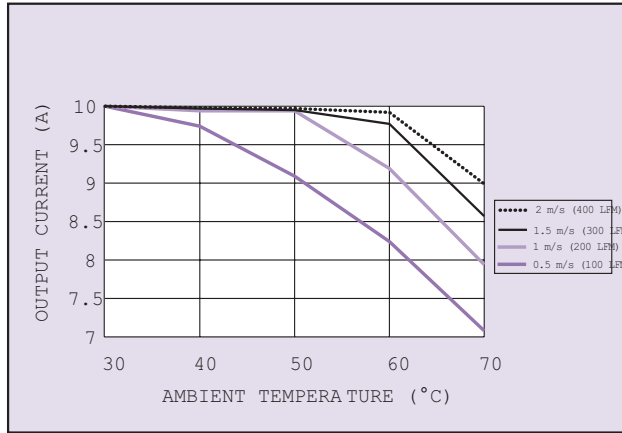


Figure 1: Thermal Derating Curve 3.3 Vin

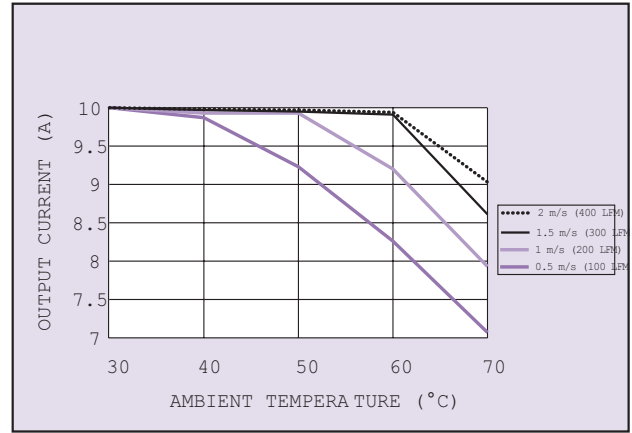


Figure 2: Thermal Derating Curve 5 Vin

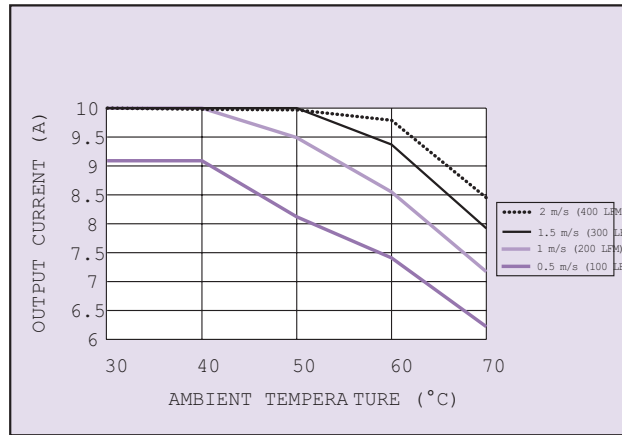


Figure 3: Thermal Derating Curve 12 Vin

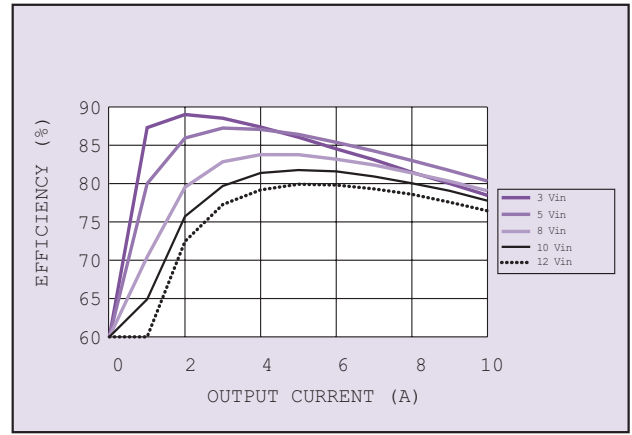


Figure 4: Efficiency vs. Load

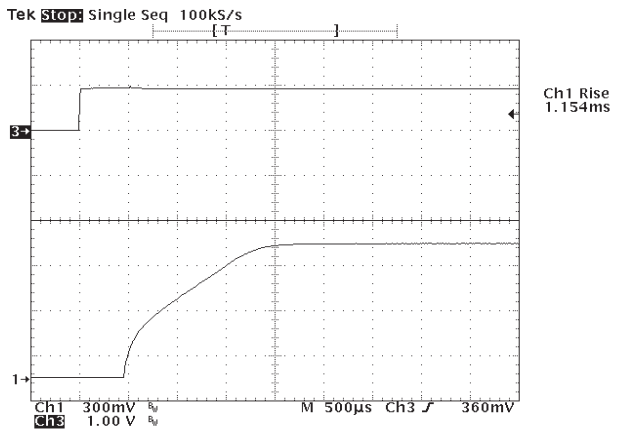


Figure 5: Remote On/Off
(Channel 1: Output Voltage, Channel 3: Enable)

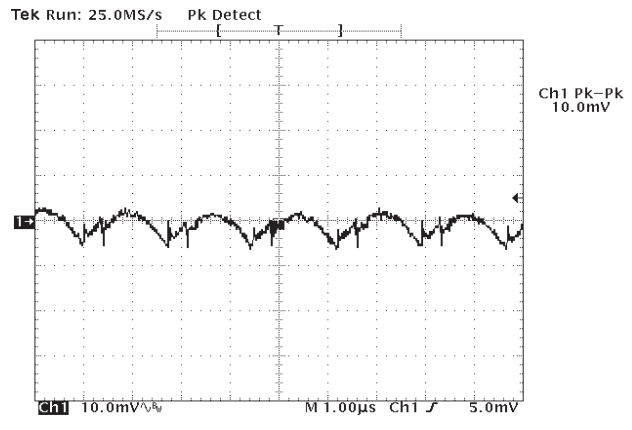


Figure 6: Typical Output Ripple

0.9 V Setpoint

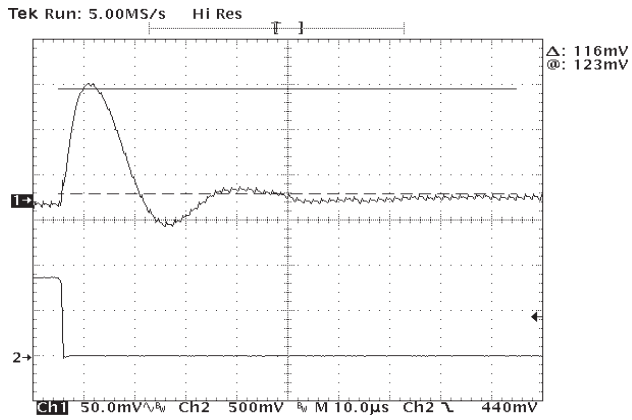


Figure 7: Transient Response 100% - 70%
(Channel 4: Current Step at 1.7 A/div,
Channel 1: Output Voltage Deviation)

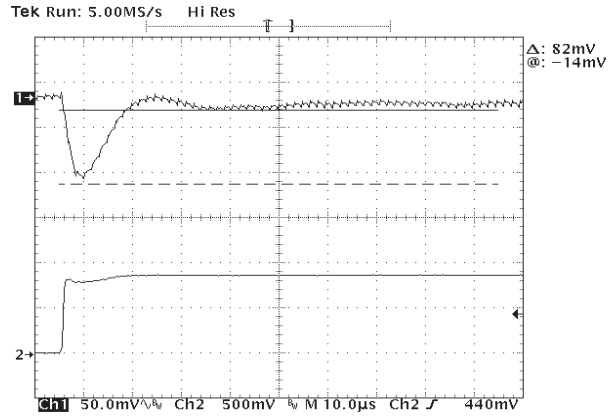


Figure 8: Transient Response 70% - 100%
(Channel 4: Current Step at 1.7 A/div,
Channel 1: Output Voltage Deviation)

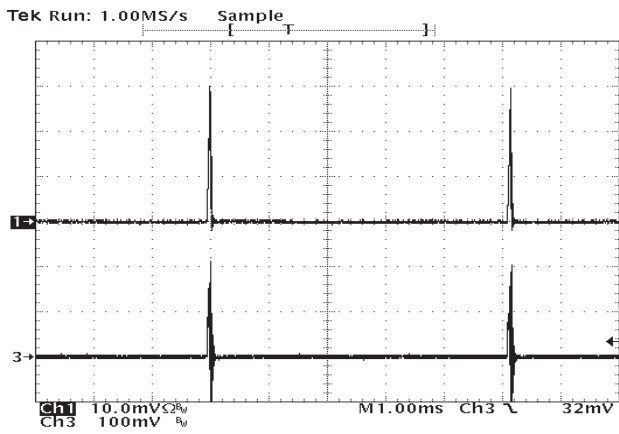


Figure 9: Short Circuit Characteristic
(Channel 2: Output Current at 10 A/div,
Channel 1: Output Voltage)

2.5 V Setpoint

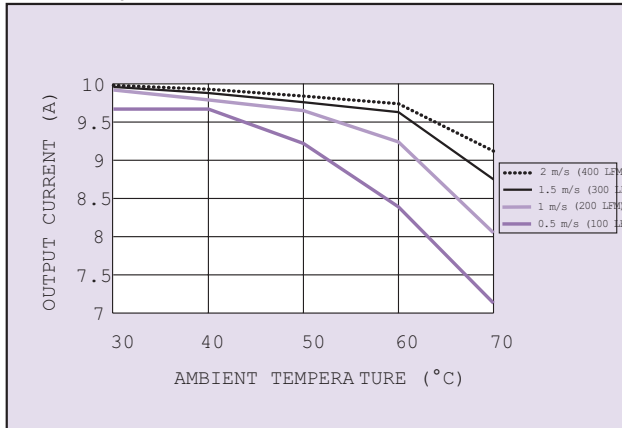


Figure 10: Thermal Derating Curve 3.3 Vin

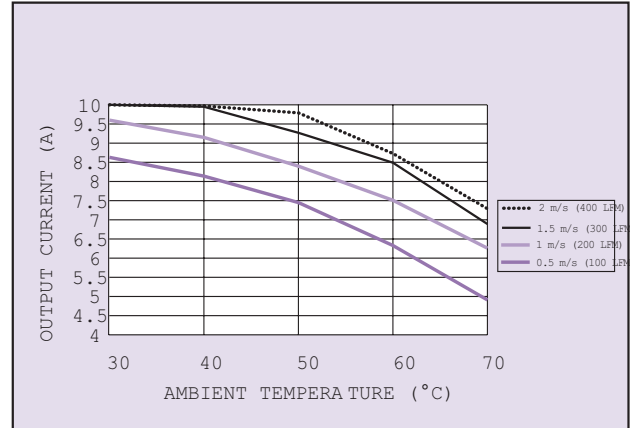


Figure 11: Thermal Derating Curve 5 Vin

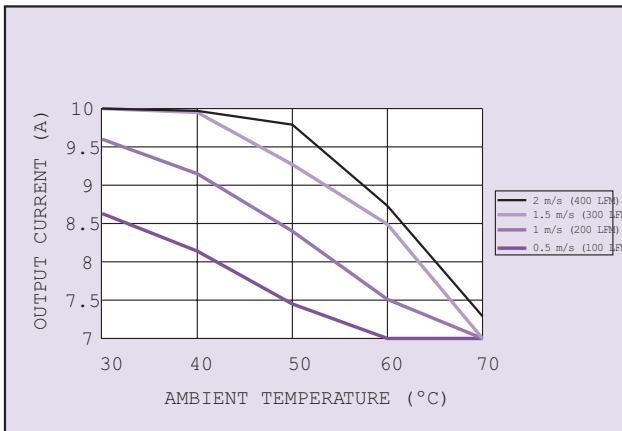


Figure 12: Thermal Derating Curve 12 Vin

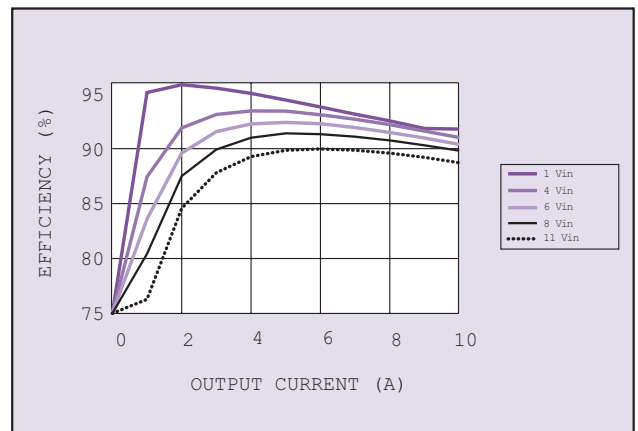


Figure 13: Efficiency vs. Load

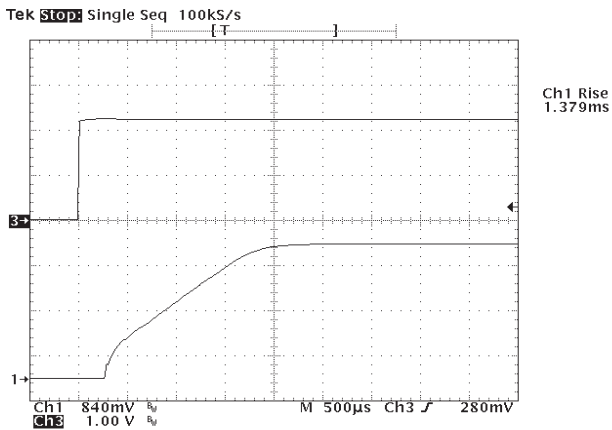


Figure 14: Remote On/Off
(Channel 1: Output Voltage, Channel 3: Enable)

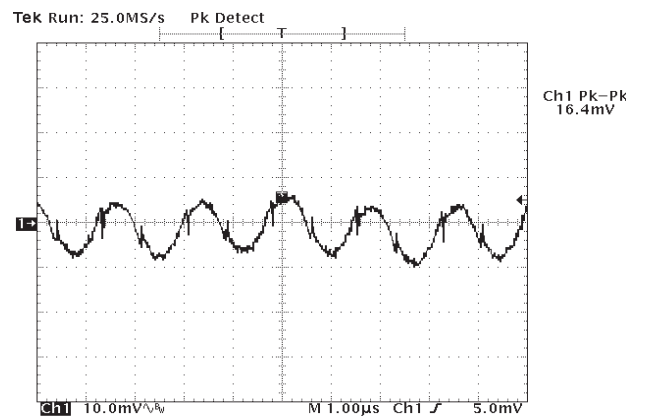


Figure 15: Typical Output Ripple

2.5 V Setpoint

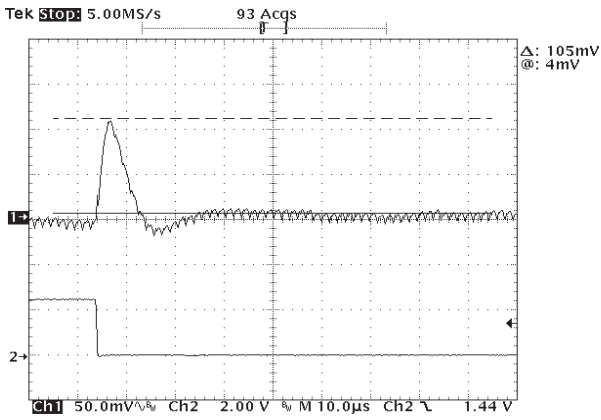


Figure 16: Transient Response 100% - 50%
(Channel 1: Output Voltage Deviation,
Channel 2: Output Current)

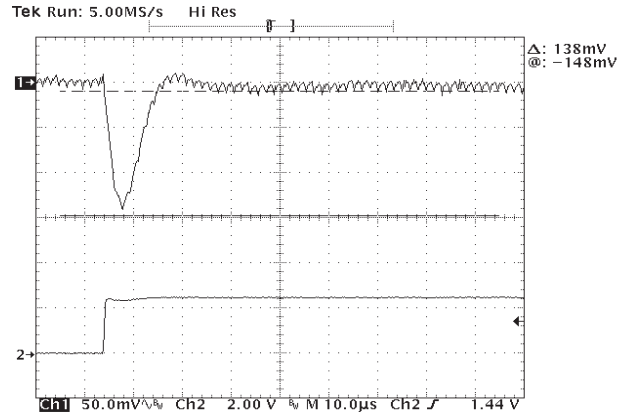


Figure 17: Transient Response 50% - 100%
(Channel 1: Output Voltage Deviation,
Channel 2: Output Current)

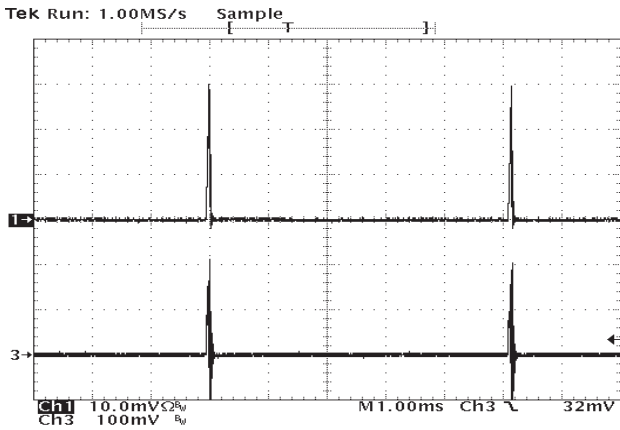


Figure 18: Short Circuit Characteristic
(Channel 1: Output Current at 10 A/div,
Channel 3: Output Voltage)

5 V Setpoint

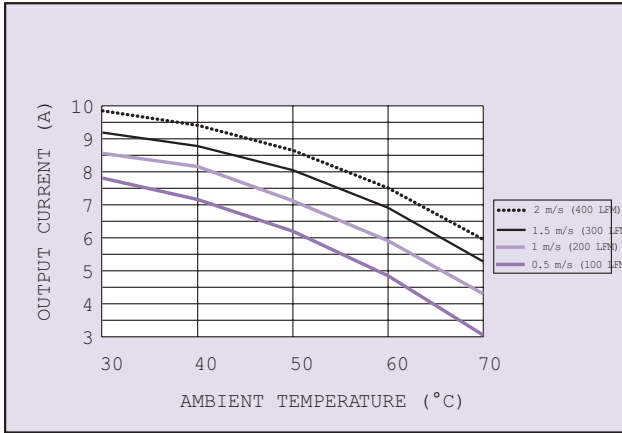


Figure 19: Thermal Derating Curve 12 Vin

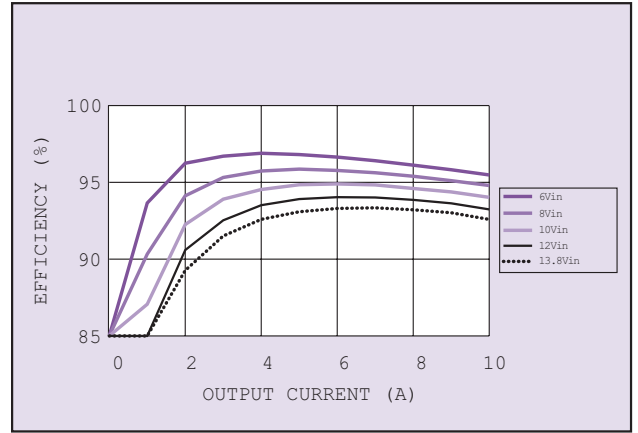


Figure 20: Efficiency vs. Load

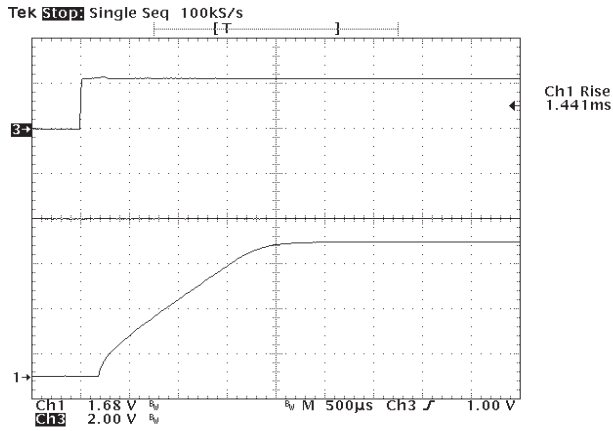


Figure 21: Remote On/Off
(Channel 1: Output Voltage, Channel 3: Enable)

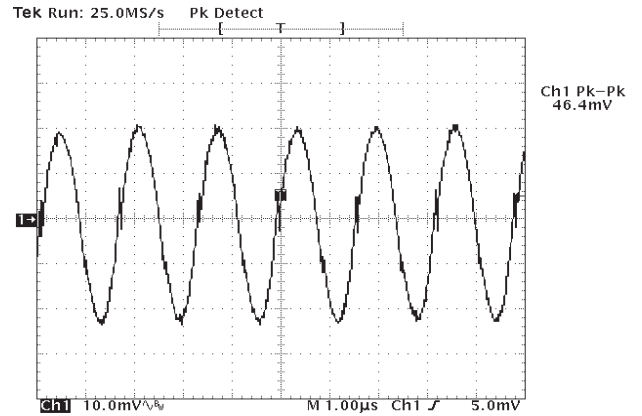


Figure 22: Typical Output Ripple

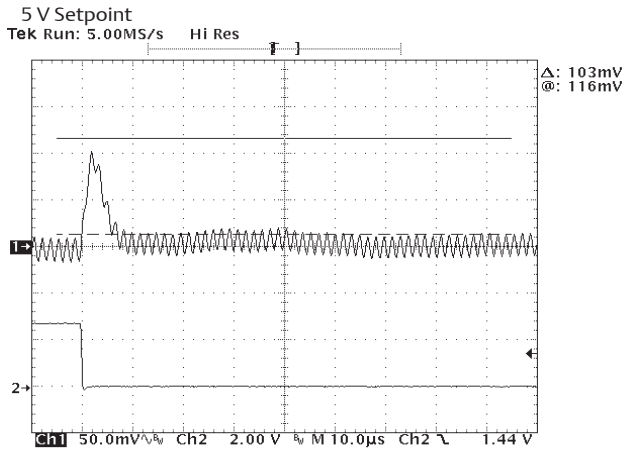


Figure 23: Transient Response 100% - 70%
 (Channel 2: Current Step at 2.5 A/div,
 Channel 1: Output Voltage Deviation)

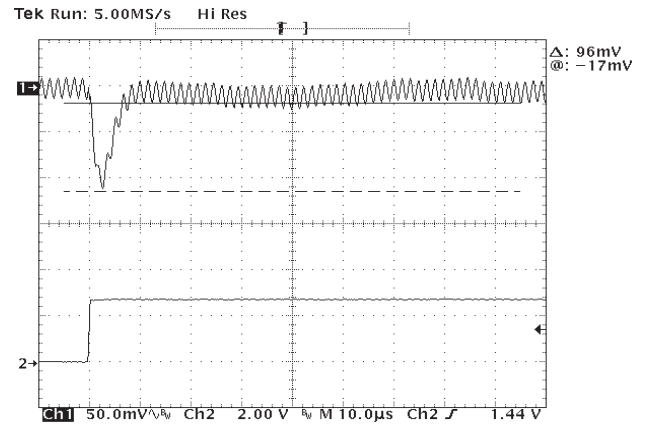


Figure 24: Transient Response 70% - 100%
 (Channel 2: Current Step at 2.5 A/div,
 Channel 1: Output Voltage Deviation)

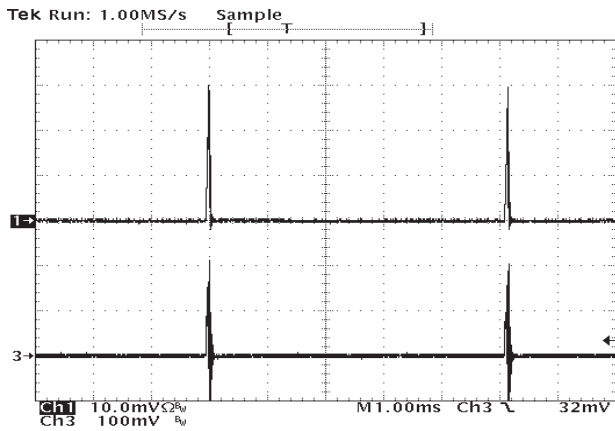


Figure 25: Short Circuit Characteristic
 (Channel 1: Output Current at 10 A/div,
 Channel 3: Output Voltage)

Pin Connections

Pin No.	Function
1	Enable
2	Vin
3	Common / RTN
4	Vout
5	PG / Trim
6	Mech Pin (Horz/SMT only)

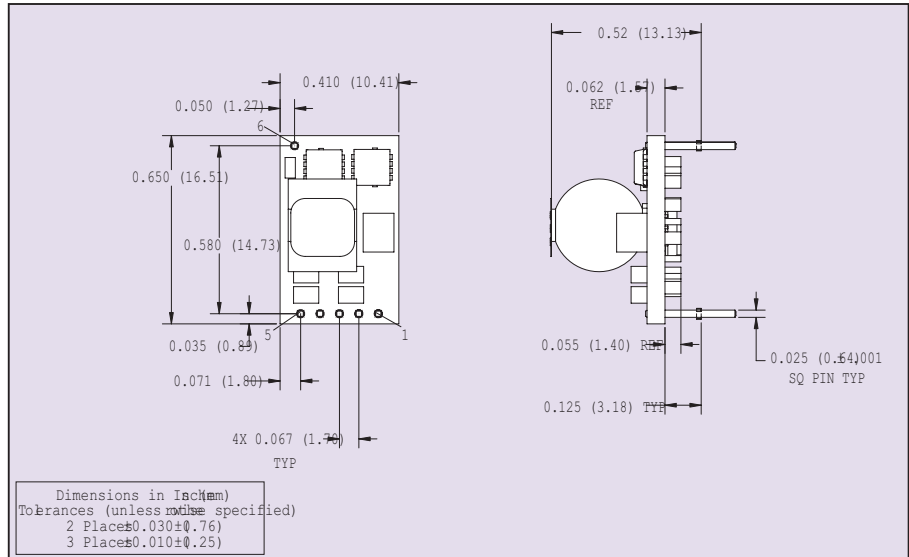


Figure 26: Mechanical Drawing - Horizontal

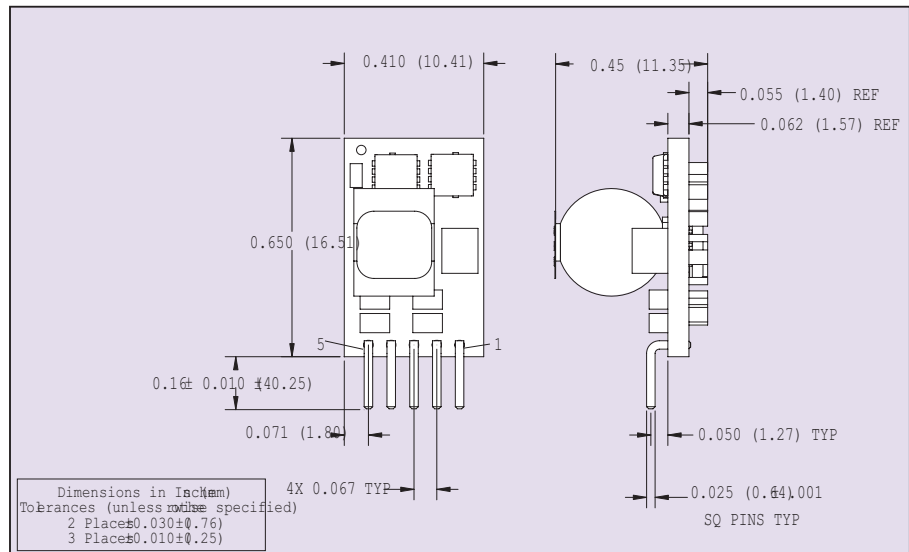


Figure 27: Mechanical Drawing - Vertical

Pin Connections

Pin No.	Function
1	Enable
2	Vin
3	Common / RTN
4	Vout
5	PG / Trim
6	Mech Pin (Horz/SMT only)

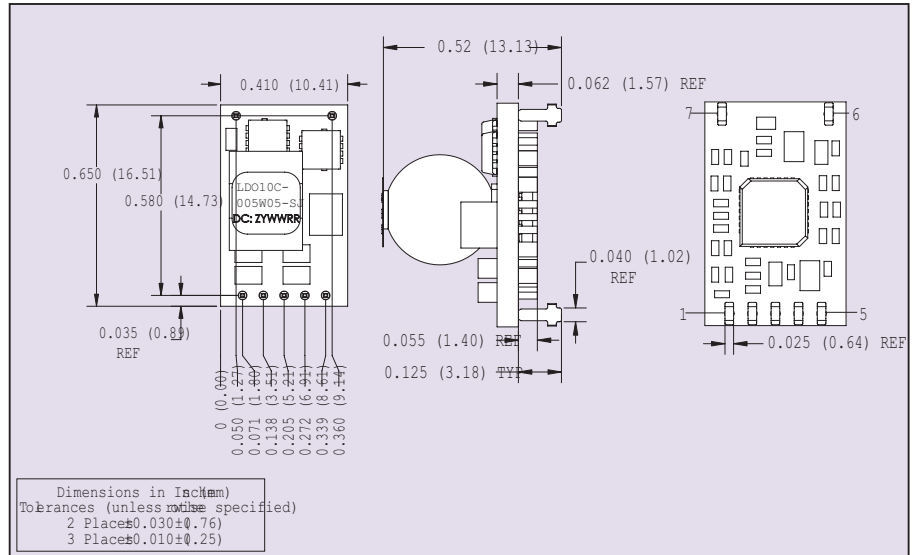


Figure 28: Mechanical Drawing - Surface Mount

Note 1

Thermal reference point is defined as the highest temperature measured at any one of the specified thermal reference points. See Application Note 186.

Note 2

The control pin is referenced to Ground.

Note 3

The LDO10C is supplied as standard with positive logic. Control input pulled low: Unit Disabled
Control input left open: Unit Enabled



AMERICAS

5810 Van Allen Way
Carlsbad, CA 92008

USA

☎ +760 930 4600

☎ +760 930 0698

EUROPEAN (UK)

Waterfront Business Park
Merry Hill, Dudley
West Midlands, DY5 1LX

United Kingdom

☎ +44 (0) 1384 842 211

☎ +44 (0) 1384 843 355

ASIA (HK)

16th - 17th Floors, Lu Plaza
2 Wing Yip Street, Kwun Tong
Kowloon, Hong Kong

☎ +852 2176 3333

☎ +852 2176 3888

FOR GLOBAL CONTACT, VISIT:www.Emerson.com/EmbeddedPower**FOR GLOBAL CONTACT, VISIT:**www.powerconversion.com/support/product/technical-support.php**EmersonNetworkPower.com**

Emerson Network Power and the Emerson Network Power logo are trademarks and service marks of Emerson Electric Co.
©2011 Emerson Electric Co.

