

ARTESYN AVD75B-48S12 Series

75 Watts 1/16 Brick Converter



PRODUCT DESCRIPTION

Advanced Energy's Artesyn AVD75B-48S12 is a single output DC/DC converter with standard sixteenth-brick outline and pin configuration. It delivers up to 6.25A output current with 12V output voltage. Above 93% ultra-high efficiency and excellent thermal performance make it an ideal choice to supply power in telecom and datacom.

AT A GLANCE

Total Power

75 Watts

Input Voltage

36 to 75 Vdc

of Outputs

Single



SPECIAL FEATURES

- Delivering up to 6.25A output current
- Ultra-high efficiency 93% typ. at full load
- Wide input range: 36V to 75V
- Excellent thermal performance
- No minimum load requirement
- Basic isolation
- High power density
- Low output noise
- RoHS 3.0
- Startup Pre-bias
- Remote control function
- Remote output sense
- Trim function: 80% ~ 110%
- Input under voltage lockout
- Output over current protection
- Output short protection
- Output over voltage protection
- Over temperature protection
- Industry standard sixteenth-brick pin-out outline
- SMT or through-hole option

SAFETY

- UL UL/CSA 60950-1
- TUV EN 62368-1
- CE EN 62368-1
- CE and UKCA Mark

TYPICAL APPLICATIONS

- Telecom
- Datacom

MODEL NUMBERS

Standard	Output Voltage	Output Current	Structure	Remote ON/OFF logic	RoHS
AVD75B-48S12B-6L	12Vdc	6.25A	Baseplate	Negative	RoHS 3.0
AVD75B-48S12-6L	12Vdc	6.25A	Open-frame	Negative	RoHS 3.0
AVD75B-48S12TL	12Vdc	6.25A	Open-frame	Negative	RoHS 3.0
AVD75B-48S12B-4L	12Vdc	6.25A	Baseplate	Negative	RoHS 3.0

Order Information

AVD75B	-	48	S	12	P	B	-	6	L
①		②	③	④	⑤	⑥	⑦	⑧	⑨

①	Model series	AVD: high efficiency sixteenth brick series, 75: output power 75W
②	Input voltage	48: 36V to 75V input range, rated input voltage 48V
③	Output number	S: single output
④	Rated output voltage	12: 12V output
⑤	Remote ON/OFF logic	Default: negative logic; P: positive logic
⑥	Baseplate	B: with baseplate; default: open frame
⑦	-	Need "-" for through-hole unit, to separate the data of voltage and pin length, omit for SMT unit
⑧	Pin length	T: SMT; 6: 3.8mm ± 0.25mm pin length; 4: 4.8mm ± 0.25mm
⑨	RoHS status	L: RoHS 3.0

Options

None

ELECTRICAL SPECIFICATIONS

Absolute Maximum Ratings

Stress in excess of those listed in the “Absolute Maximum Ratings” may cause permanent damage to the power supply. These are stress ratings only and functional operation of the unit is not implied at these or any other conditions above those given in the operational sections of this TRN. Exposure to any absolute maximum rated condition for extended periods may adversely affect the power supply's reliability.

Table 1. Absolute Maximum Ratings

Parameter	Model	Symbol	Min	Typ	Max	Unit
Input Voltage Operating -Continuous Non-operating -100mS	All All	$V_{IN,DC}$	- -	- -	80 100	Vdc Vdc
Maximum Output Power	All	$P_{O,max}$	-	-	75	W
Isolation Voltage ¹ Input to output	All		-	-	2250	Vdc
Ambient Operating Temperature	All	T_A	-40	-	+85	°C
Storage Temperature	All	T_{STG}	-55	-	+125	°C
Voltage at remote ON/OFF pin	All		-0.3	-	+12	Vdc
Humidity (non-condensing) Operating Non-operating	All All		- -	- -	95 95	% %

Note 1 - 1mA for 60s, slew rate of 1500V/10s.

ELECTRICAL SPECIFICATIONS

Input Specifications

Table 2. Input Specifications

Parameter	Conditions ¹	Symbol	Min	Typ	Max	Unit
Operating Input Voltage, DC	All	V _{IN,DC}	36	48	75	Vdc
Turn-on Voltage Threshold	I _O = I _{O,max}	V _{IN,ON}	31	-	36	Vdc
Turn-off Voltage Threshold	I _O = I _{O,max}	V _{IN,OFF}	30	-	35	Vdc
Lockout Voltage Hysteresis	I _O = I _{O,max}		1	-	3	V
Maximum Input Current (I _O = I _{O,max})	V _{IN,DC} = 36Vdc	I _{IN,max}	-	-	3	A
Recommended Input Fuse	Fast blow external fuse recommended		-	-	5	A
Recommended External Input Capacitance	Low ESR capacitor recommended	C _{IN}	100	-	-	uF
Input Reflected Ripple Current	Through 12uH inductor	I _{IN,typ}	-	25	-	mA
Operating Efficiency	T _A = 25 °C I _O = I _{O,max} I _O = 50%I _{O,max}	η	-	93.3 91	-	%

Note 1 - Ta = 25 °C, airflow rate = 400 LFM, Vin = 48Vdc, nominal Vout unless otherwise noted.

ELECTRICAL SPECIFICATIONS

Output Specifications

Table 3. Output Specifications						
Parameter	Conditions ¹	Symbol	Min	Typ	Max	Unit
Factory Set Voltage	$V_{IN,DC} = 48Vdc$ $I_O = 50\%I_{O,max}$	V_O	11.88	12	12.12	Vdc
Output Voltage Line Regulation	All	$\pm\%V_O$	-	0.06	-	%
		$\pm V_O$	-	7.5	-	mV
Output Voltage Load Regulation	All	$\pm\%V_O$	-	0.06	-	%
		$\pm V_O$	-	7.5	-	mV
Output Voltage Temperature Regulation	All	$\%V_O$	-	-	0.02	%/°C
Output Voltage Trim Range	All	V_O	9.6	-	13.2	V
Output Ripple, pk-pk	Measure with a 1uF ceramic capacitor in parallel with a 10uF tantalum capacitor, 0 to 20MHz bandwidth	V_O	-	64	-	mV_{PK-PK}
Output Current	All	I_O	0	-	6.25	A
Output DC current-limit inception ²	All	I_O	7.3	-	15	A
V_O Load Capacitance ³	All	C_O	220	-	3300	uF
V_O Dynamic Response	Peak Deviation Settling Time	$\frac{\pm V_O}{T_s}$	-	60 50	-	mV_{uSec}
		$\frac{\pm V_O}{T_s}$	-	70 100	-	mV_{uSec}
Turn-on Transient	Rise time	$I_O = I_{O,max}$	T_{rise}	-	20	mS
	Turn-on delay time	$I_O = I_{O,max}$	$T_{turn-on}$	-	10	mS
	Output voltage overshoot	$I_O = 0$	$\%V_O$	-	5	%
Switching Frequency	All	f_{SW}	-	350	-	KHz
Remote ON/OFF control (Positive logic)	Off-state voltage	All	-	-0.3	-	1.2
	On-state voltage	All	-	3.5	-	5
Remote ON/OFF control (Negative logic)	Off-state voltage	All	-	3.5	-	5
	On-state voltage	All	-	-0.3	-	1.2

Note 1 - $T_a = 25^{\circ}\text{C}$, airflow rate = 400 LFM, $Vin = 48Vdc$, nominal $Vout$ unless otherwise noted.

Note 2 - Hiccup: auto-restart when over-current condition is removed.

Note 3 - High frequency and low ESR is recommended.

ELECTRICAL SPECIFICATIONS

Output Specifications

Table 3. Output Specifications Con't						
Parameter	Conditions	Symbol	Min	Typ	Max	Unit
Output over-voltage protection ⁴	Static	V _O	14	-	16.8	V
	Dynamic	V _O	14	-	17.0	V
Output over-temperature protection ⁵	All	T	-	120	-	°C
Over-temperature hysteresis	All	T	-	10	-	°C
MTBF ⁶	Telcordia SR-332-2006; 80% load, 300LFM, 40 °C T _A		2.0	-	-	10 ⁶ h






Note 4 - Hiccup: auto-restart when over-voltage condition is removed.

Note 5 - Auto recovery, over-temperature protect(OTP) test point: see Figure 10 and Figure 11.

Note 6 - 300LFM, 40°C, 48Vdc input voltage, 80%I_{O,max}




ELECTRICAL SPECIFICATIONS

AVD75B-48S12 Performance Curves

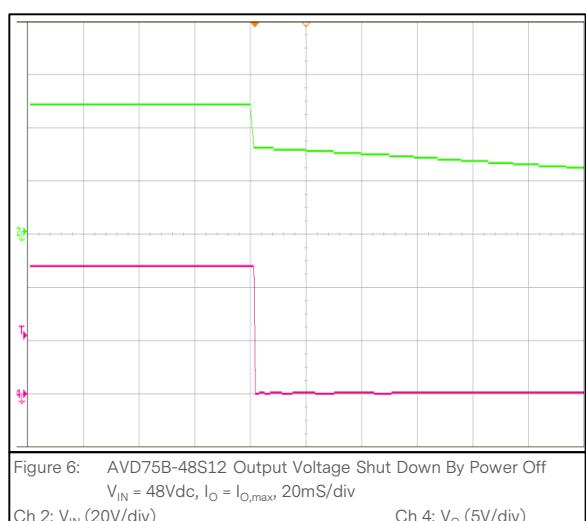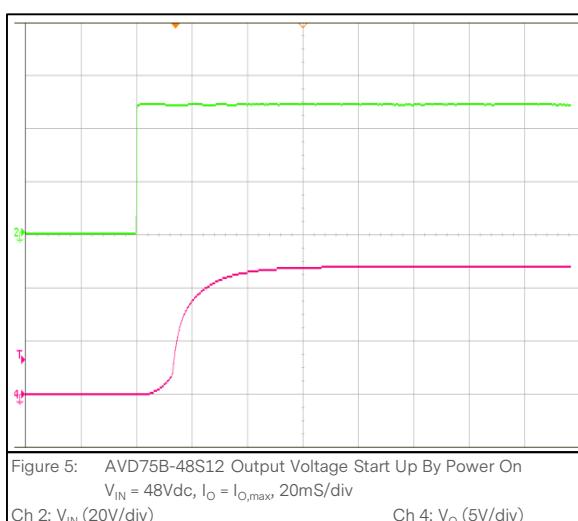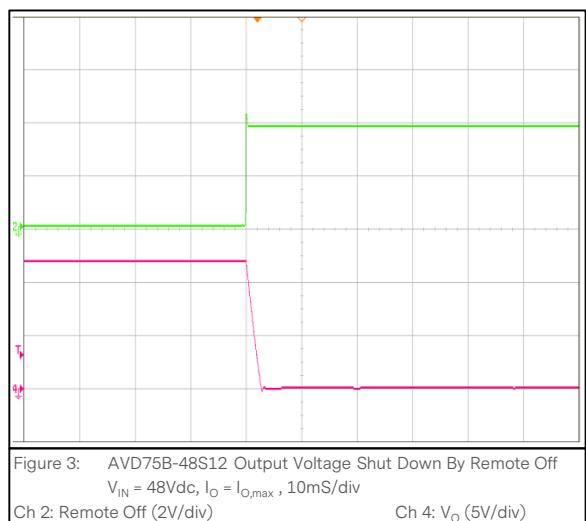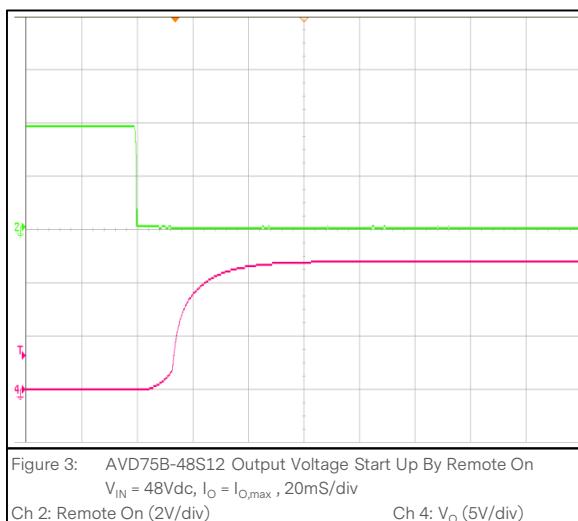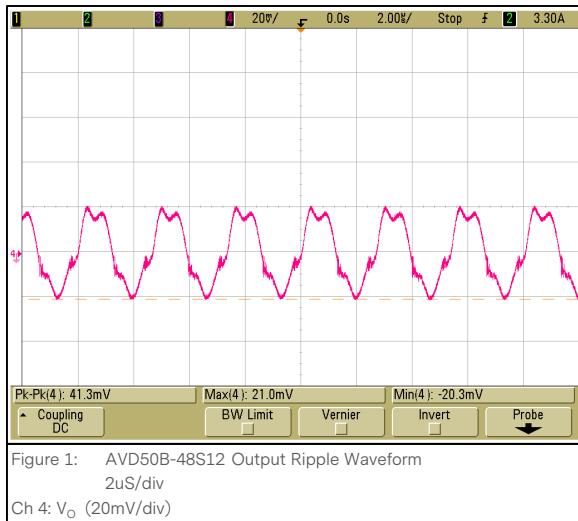


ELECTRICAL SPECIFICATIONS

AVD75B-48S12 Performance Curves

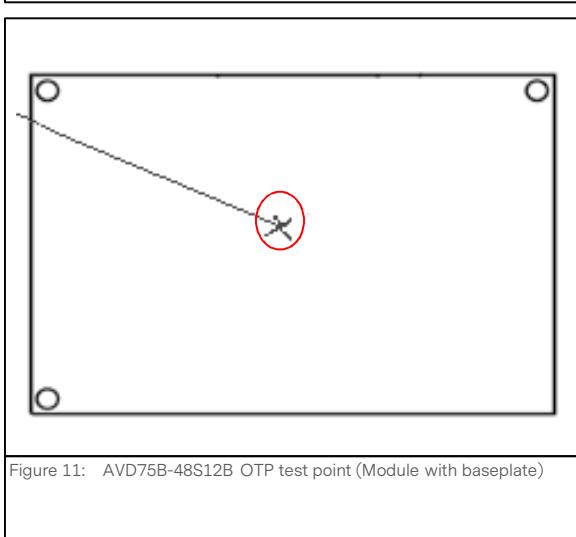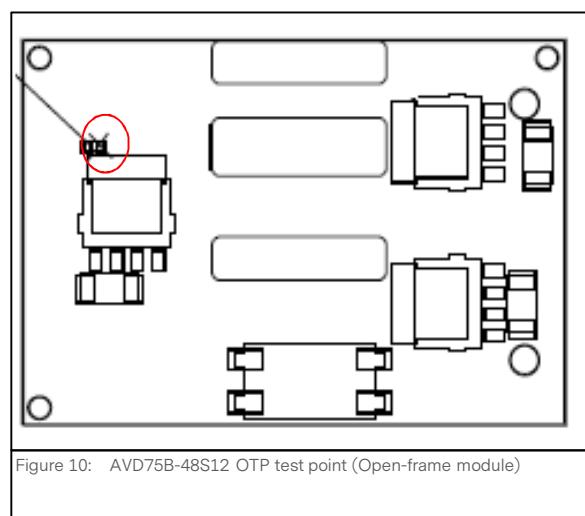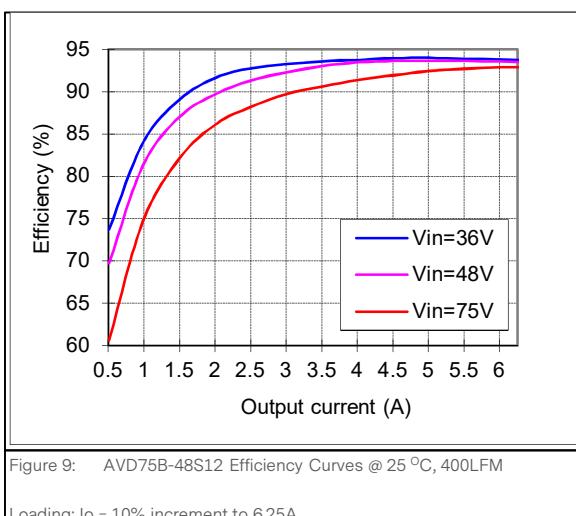

MECHANICAL SPECIFICATIONS

Mechanical Outlines – Surface Mounted Module

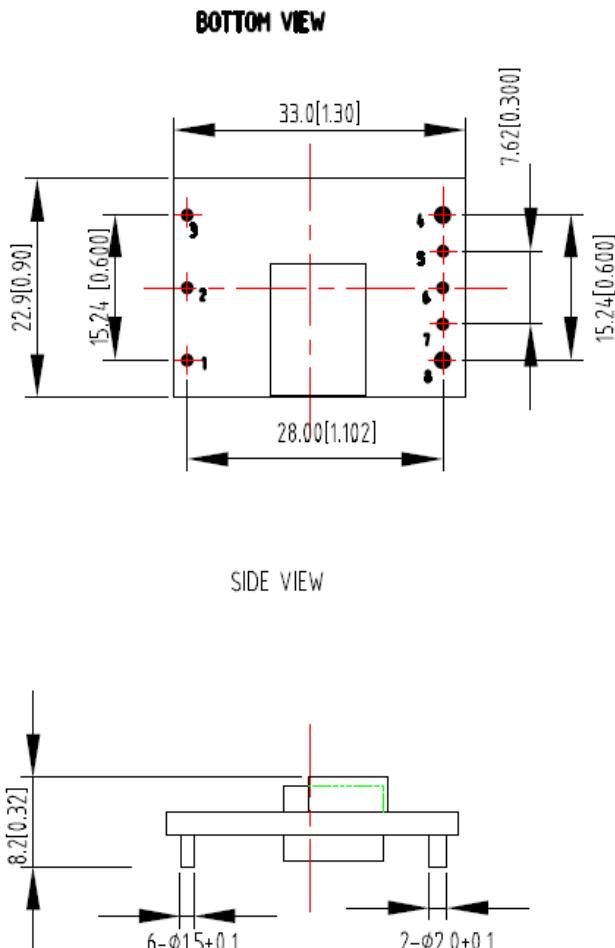



UNIT: mm[inch]

TOLERANCE: X.Xmm±0.5mm[X.XX in.±0.02in.]
X.XXmm±0.25mm[X.XXX in.±0.01in.]

Figure 12: Mechanical Outlines for Surface Mounted Module

MECHANICAL SPECIFICATIONS

Mechanical Outlines – Open Frame Module

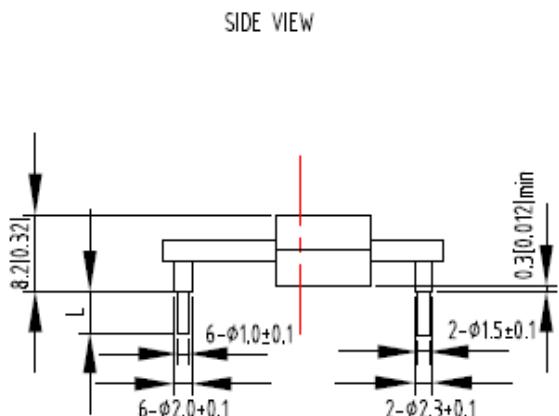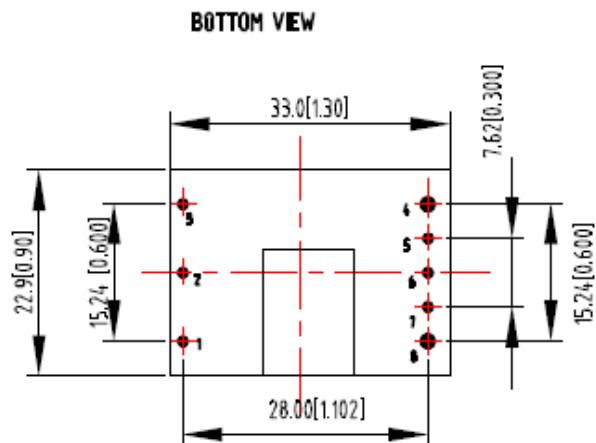


UNIT: mm[inch]

TOLERANCE: X.Xmm±0.5mm[X.XX in.±0.02in.]
X.XXmm±0.25mm[X.XXX in.±0.01in.]

Figure 13: Mechanical Outlines for Open Frame Module

MECHANICAL SPECIFICATIONS

Mechanical Outlines – Baseplate Module

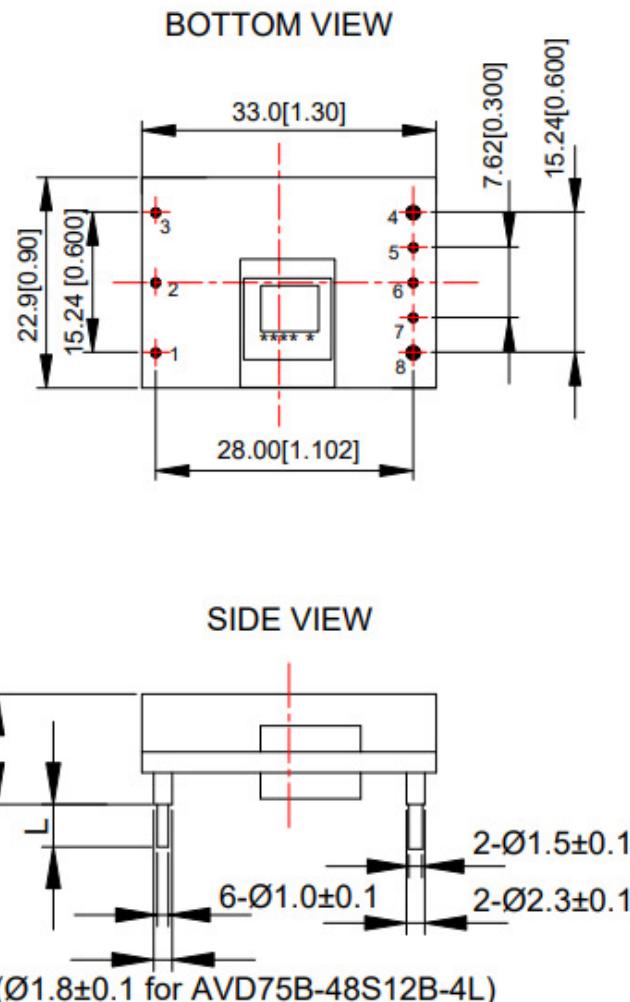

UNIT: mm[inch]

TOLERANCE: X.Xmm±0.5mm[X.XX in.±0.02in.]

X.XXmm±0.25mm[X.XXX in.±0.01in.]

Figure 14: Mechanical Outlines for Baseplate Module

Note: Depth penetration into base plate, of M3 screws used at baseplate mounting holes, not to exceed maximum of 3.0mm.

MECHANICAL SPECIFICATIONS

Pin length option

Device code suffix	L
-4	4.8mm±0.25mm
-6	3.8mm±0.25mm
-8	2.8mm±0.25mm
None	5.8mm±0.25mm

Pin Designations

Pin No	Name	Function
1	Vin+	Positive input terminal
2	Remote On/Off	Remote control terminal
3	Vin-	Negative input terminal
4	Vo-	Negative output terminal
5	S-	Negative remote sense terminal
6	Trim	Output voltage trim terminal
7	S+	Positive remote sense terminal
8	Vo+	Positive output terminal

ENVIRONMENTAL SPECIFICATIONS

Electromagnetic compatibility Characteristics

AVD75B-48S12 power supply is designed to meet the following EMC immunity specifications:

Table 4. Environmental Specifications

Document	Description	Criteria
EN55032, Class A Limits	Conducted and Radiated EMI Limits, DC input port	/
IEC/EN 61000-4-2, Level 3	Electromagnetic Compatibility (EMC) - Testing and measurement techniques - Electrostatic discharge immunity test. Enclosure Port	B
IEC/EN 61000-4-6, Level 2	Electromagnetic Compatibility (EMC) - Testing and measurement techniques, Continuous Conducted Interference. DC input port	A
IEC/EN 61000-4-4, Level 3	Electromagnetic Compatibility (EMC) - Testing and measurement techniques, Electrical Fast Transient. DC input port.	B
IEC/EN 61000-4-5	Electromagnetic Compatibility (EMC) - Testing and measurement techniques, Immunity to surges - 600V common mode and 600V differential mode for DC ports	B
EN61000-4-29	Electromagnetic Compatibility (EMC) - Testing and measurement techniques, Voltage Dips and short interruptions and voltage variations. DC input port	B

Criterion A: Normal performance during and after test.

Criterion B: For EFT and surges, low-voltage protection or reset is not allowed. Temporary output voltage fluctuation ceases after disturbances ceases, and from which the EUT recovers its normal performance automatically. For Dips and ESD, output voltage fluctuation or reset is allowed during the test, but recovers to its normal performance automatically after the disturbance ceases.

ENVIRONMENTAL SPECIFICATIONS

Safety Certifications

The AVD75B-48S12 power supply is intended for inclusion in other equipment and the installer must ensure that it is in compliance with all the requirements of the end application. This product is only for inclusion by professional installers within other equipment and must not be operated as a stand alone product.

Table 5. Safety Certifications for AVD75B-48S12 power supply system

Standard	Agency	Description
UL 60950-1, 2nd Edition, 2014-10-14; CAN/CSA C22.2 No. 60950-1-07, 2nd Edition, 2014-10	UL+CUL	US and Canada Requirements
EN 62368-1:2014/A11:2017	TUV-SUD	European Requirements
EN 62368-1:2014+A11:2017	CE	CE Marking
UKCA	UKCA	UK Requirements

ENVIRONMENTAL SPECIFICATIONS

Operating Temperature

The AVD75B-48S12 series power supply will start and operate within stated specifications at an ambient temperature from -40 °C to 85 °C under all load conditions. The storage temperature is -55 °C to 125 °C.

Thermal Considerations

The converter is designed to operate in different thermal environments and sufficient cooling must be provided. Proper cooling of the DC/DC converter can be verified by measuring the temperature at the test point as shown in the Figure 15. The temperature at this point should not exceed the max values in the table 6.

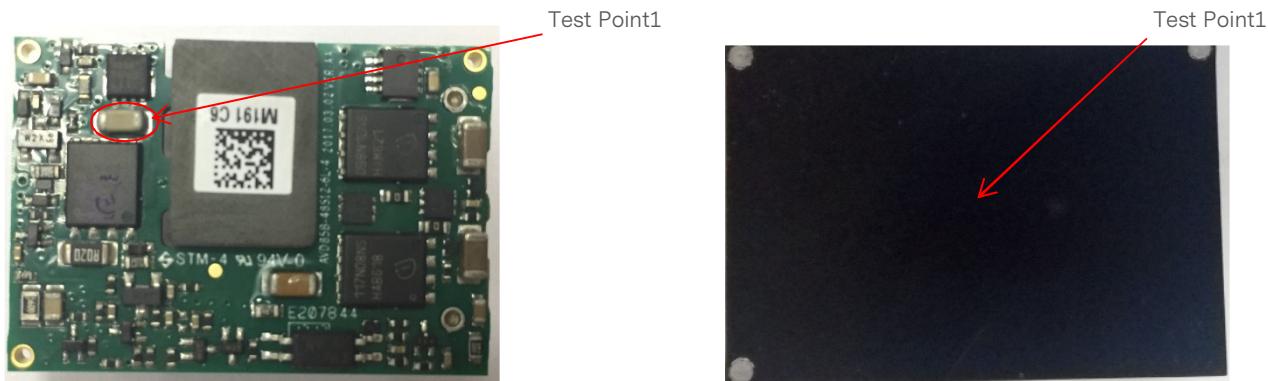


Figure 15: Temperature test point

Table 6. Temperature limit of the test point

Test Point	Temperature limit
Test point 1(C3)	135°C
Test point 2 (Baseplate)	120°C

ENVIRONMENTAL SPECIFICATIONS

Thermal Considerations – Con't

For a typical application, below are the derating curves show the derating of output current vs. ambient air temperature at different air velocity. The airflow direction is from Vin- to Vin+.

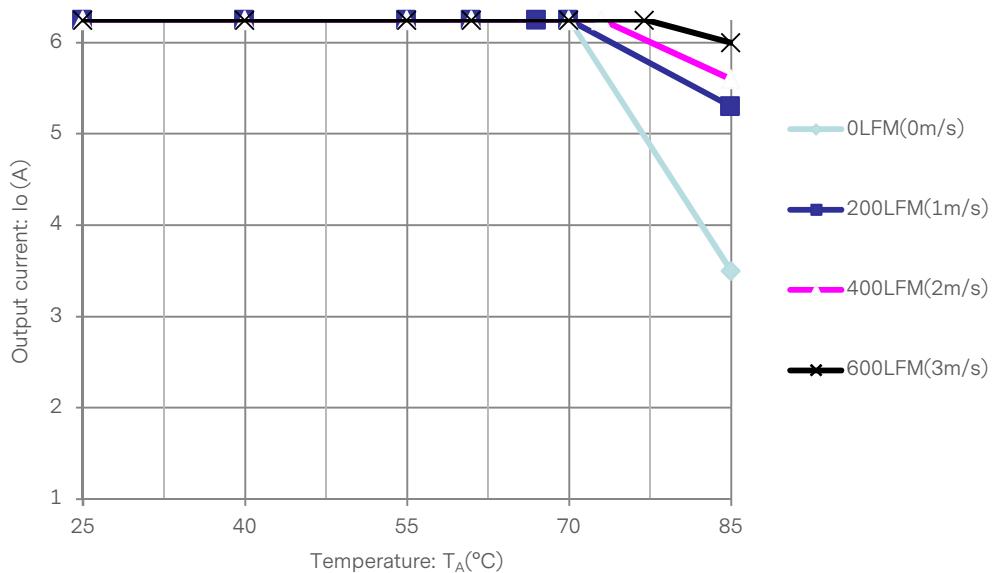


Figure 16: AVD75B-48S12-6L and AVD75B-48S12TL

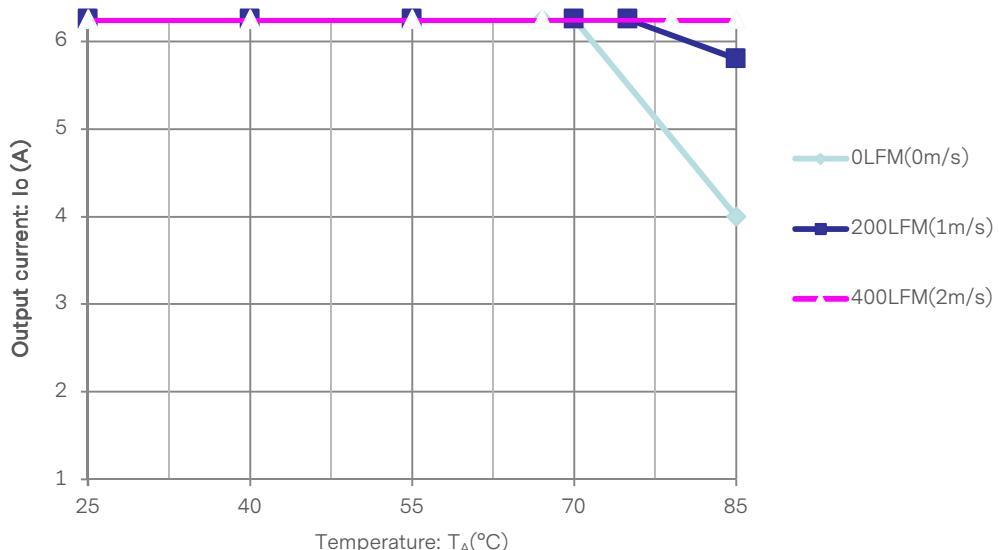


Figure 17: AVD75B-48S12B-6L

ENVIRONMENTAL SPECIFICATIONS

Qualification Testing

Parameter	Unit (pcs)	Test condition
Halt test	4-5	$T_{a,min}-20\text{ }^{\circ}\text{C}$ to $T_{a,max}+25\text{ }^{\circ}\text{C}$, 10 $^{\circ}\text{C}$ step, V_{in} = min to max, 0 ~ 100% load
Vibration	3	Frequency range: 5Hz ~ 20Hz, 20Hz ~ 200Hz, A.S.D: 1.0m ² /s ³ , -3db/oct, axes of vibration: X/Y/Z. Time: 30min/axes
Mechanical Shock	3	30g, 6ms, 3axes, 6directions, 3time/direction
Thermal Shock	3	-55 $^{\circ}\text{C}$ to 125 $^{\circ}\text{C}$, unit temperature 20 cycles
Thermal Cycling	3	-40 $^{\circ}\text{C}$ to 55 $^{\circ}\text{C}$, temperature change rate: 1 $^{\circ}\text{C}/\text{min}$, cycles: 2cycles
Humidity	3	40 $^{\circ}\text{C}$, 95%RH, 48h
Solder Ability	15	IPC J-STD-002C-2007

APPLICATION NOTES

Typical Application

Below is the typical application of the AVD75B-48S12 series power supply.

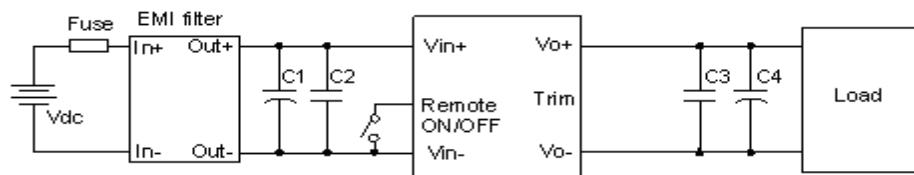


Figure 18: Typical application

C1: 220uF/100V electrolytic capacitor, P/N: UPM2A101MPD (Nichicon) or equivalent caps.

C2: 0.1uF/100V X7R ceramic capacitor, P/N: C3216X7R2A104KT0L0S (TDK) or equivalent caps.

C3: 1uF/100V X7R ceramic capacitor, P/N: C3216X7R2A105KT0L0U (TDK) or equivalent caps.

C4: 220uF oscon capacitor, P/N: CUXAE1C221M2BA (Sanyo).

Fuse: External fast blow fuse with a rating of 5A. The recommended fuse model is 0453005.MR from LITTLEFUSE.


EMI filter: see Figure 23.

48V input and full load output are default.


APPLICATION NOTES

Remote ON/OFF

Negative remote ON/OFF logic is available in AVD75B-48S12. The logic is CMOS and TTL compatible. The voltage between pin Remote ON/OFF and pin Vin- must not exceed the range listed in table “Feature characteristics” to ensure proper operation. The external Remote ON/OFF circuit is highly recommended as shown in figure 19.

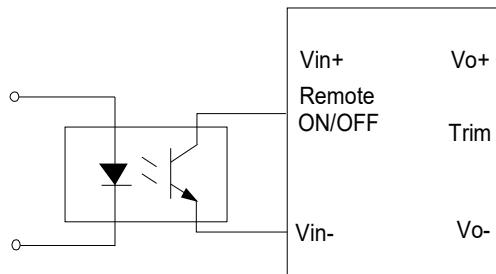

Isolated remote ON/OFF circuit

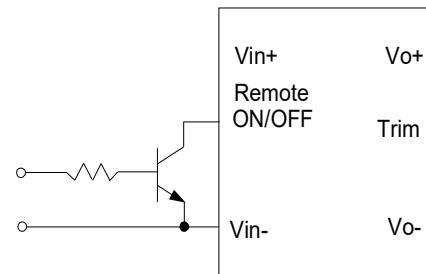

Non-isolated remote ON/OFF circuit

Figure 19: External Remote ON/OFF circuit

APPLICATION NOTES

Trim Characteristics

Connecting an external resistor between Trim pin and Vo+ pin will decrease the output voltage. While connecting it between Trim and Vo- will increase the output voltage. The following equations determine the external resistance to obtain the trimmed output voltage.

$$R_{adj-down} = \frac{510}{\Delta} - 10.2(K\Omega)$$

$$R_{adj-up} = \frac{5.1 \times V_{nom} \times (100 + \Delta)}{1.225 \times \Delta} - \frac{510}{\Delta} - 10.2(K\Omega)$$

Δ : Output rate against nominal output voltage.

$$\Delta = \frac{100 \times (V_{nom} - V_o)}{V_{nom}}$$

V_{nom} : Nominal output voltage.

For example, to get 13.2V output, the trimming resistor is

$$\Delta = \frac{100 \times (V_o - V_{o,nom})}{V_{o,nom}} = \frac{100 \times (13.2 - 12)}{12} = 10$$

$$R_{adj-up} = \frac{5.1 \times 12 \times (100 + 10)}{1.225 \times 10} - \frac{510}{10} - 10.2 = 488.35(K\Omega)$$

When trimming up, the output current should be decreased accordingly so as not to exceed the maximum output power.

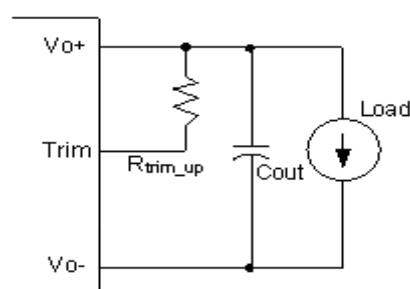


Figure 20: Trim up

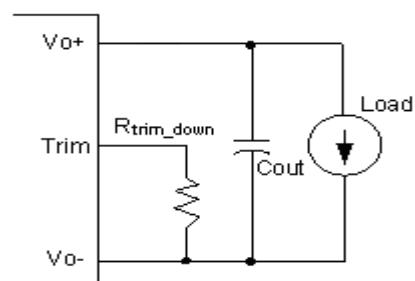


Figure 21: Trim down

If the sense compensate function is not necessary, connect S+ to Vo+ and S- to Vo- directly.

APPLICATION NOTES

Input Ripple & Inrush Current and Output Ripple & Noise Test Configuration

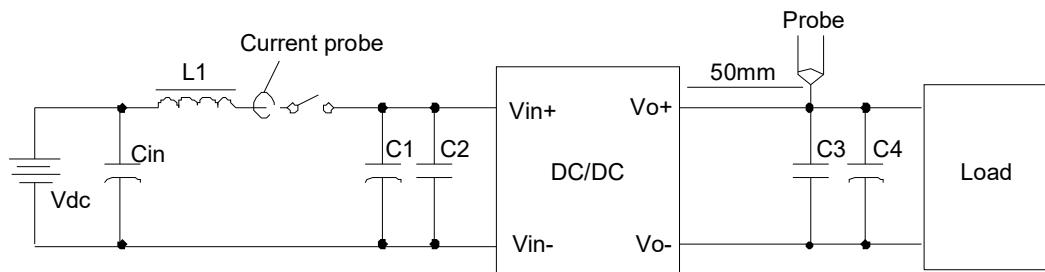


Figure 22: Input ripple & output ripple & noise test configuration

Vdc: DC power supply

L1: 12uH

Cin: 220uF/100V typical

C1 ~ C4: See Figure 18

Note - Using a coaxial cable with series 50ohm resistor and 0.68uF ceramic capacitor or a ground ring of probe to test output ripple & noise is recommended.

EMC Test configuration

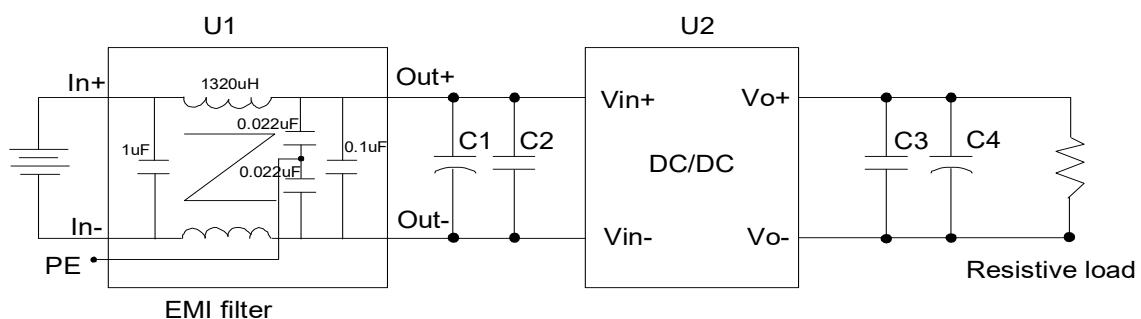


Figure 23: EMC Test configuration

U1: Input EMC filter

U2: Module to test, AVD75B-48S12

C1 ~ C4: See Figure 18

APPLICATION NOTES

Package Information

Package type

moisture sensitivity level 3, moisture barrier bags.

Minimal package QTY

192 pcs.

Package disassembly

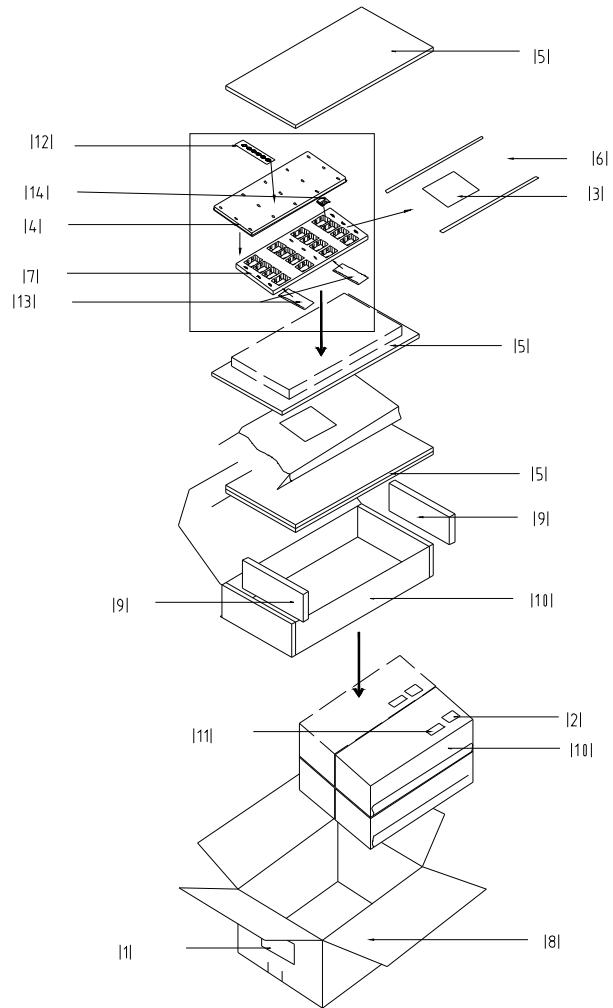


Figure 24: Package disassembly


APPLICATION NOTES

Package Information

Table 7. Assemblies description

No.	Description
1	Shipping label
2	Moisture proof identification label
3	Moistureproof caution label
4	Tray cover
5	Anti-static PE foam 1
6	Moisture barrier bag
7	Tray
8	Shipping carton
9	Anti-static PE foam 2
10	Inner box
11	Model barcode label
12	Humidity indicating card
13	Desiccant
14	Model

Package tray information

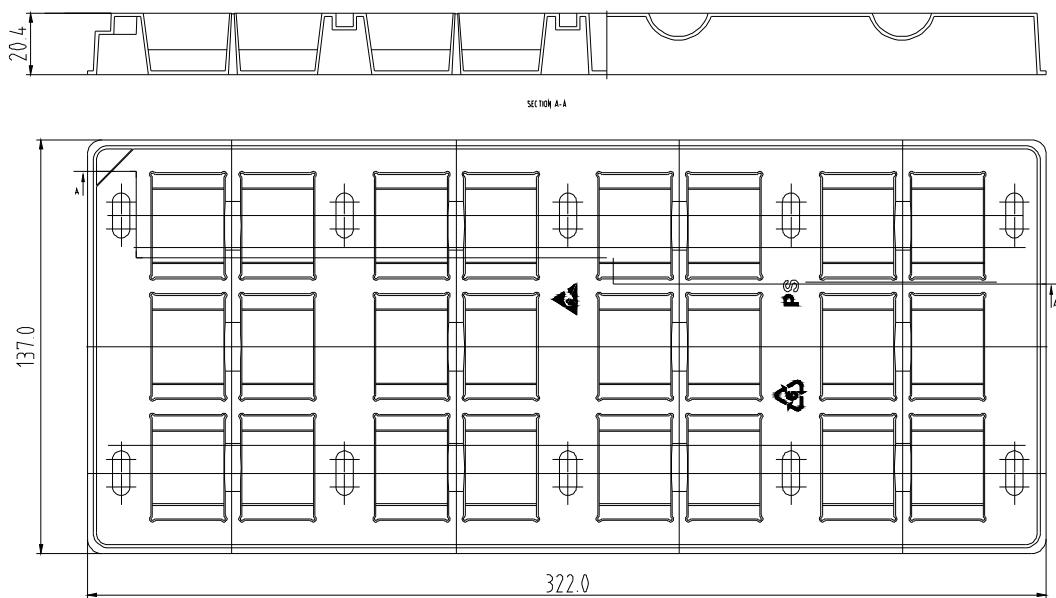

SOLDERING INFORMATION

Soldering

The product is intended for standard manual or wave soldering.

	Product Requirement	Product Name
R6	Wave soldering	AVD75B-48S12B-6L AVD75B-48S12-6L


When wave soldering is used, the temperature on pins is specified to maximum 260 °C for maximum 7s.

When soldering by hand, the iron temperature should be maintained at 300 °C ~ 380 °C and applied to the converter pins for less than 10s. Longer exposure can cause internal damage to the converter. Cleaning of solder joint can be performed with cleaning solvent IPA or simulative.

The below products are intended for standard reflow soldering.

	Product Requirement	Product Name
R6	Reflow soldering	AVD75B-48S12-6L AVD75B-48S12TL

When reflow soldering is used, please refer to following fig for recommended temperature profile parameters.

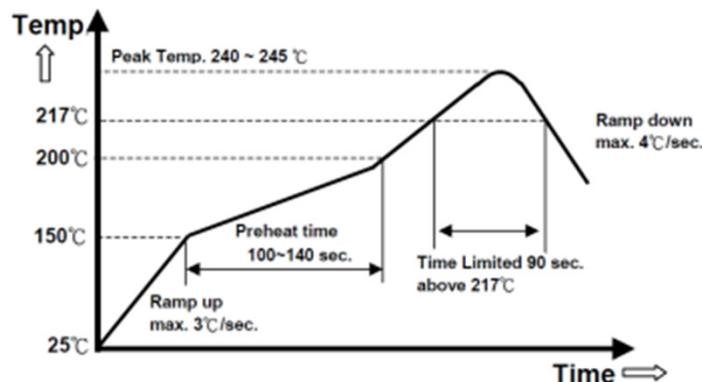

Record of Revision and Changes

Issue	Date	Description	Originators
1.0	08.08.2017	First Issue	L. Lee
1.1	11.21.2017	Update the isolation voltage	L. Lee
1.2	07.10.2018	Update the trim error	K. Wang
1.3	12.09.2019	Update the soldering information	L. Lee
1.4	06.04.2020	Update RoHS information	V. Guo
1.5	06.17.2020	Update 62368-1 cert	L.Lee
1.6	06.10.2021	Update AE template	J. Zhang
1.7	11.19.2021	Add the AVD75B-48S12B-4L	K. Wang
1.8	03.17.2022	Update UKCA mark	E. Wang
1.9	09.22.2022	Update the mechanical drawing for AVD75B-48S12B	Z. Yasheng
2.0	03.14.2023	Update OCP to 7.3 to 15 A	K. Wang
2.1	08.29.2023	Update product picture	L.Lee



For international contact information,
visit advancedenergy.com.

powersales@aei.com (Sales Support)
productsupport.ep@aei.com (Technical Support)
+1 888 412 7832

ABOUT ADVANCED ENERGY

Advanced Energy (AE) has devoted more than three decades to perfecting power for its global customers. AE designs and manufactures highly engineered, precision power conversion, measurement and control solutions for mission-critical applications and processes.

Our products enable customer innovation in complex applications for a wide range of industries including semiconductor equipment, industrial, manufacturing, telecommunications, data center computing, and medical. With deep applications know-how and responsive service and support across the globe, we build collaborative partnerships to meet rapid technological developments, propel growth for our customers, and innovate the future of power.

PRECISION | POWER | PERFORMANCE | TRUST

Specifications are subject to change without notice. Not responsible for errors or omissions. ©2020 Advanced Energy Industries, Inc. All rights reserved. Advanced Energy® and AE® are U.S. trademarks of Advanced Energy Industries, Inc.