

# ARTESYN ASA SERIES

6 Watts



Advanced Energy's Artesyn ASA series of high-input 6 watt isolated DC-DC converters features an ultra wide 4:1 input voltage range of 18–75 Vdc and is primarily designed for use with nominal 48 V supplies. There is a choice of four single output models, offering voltages of 3.3 V, 5 V, 12 V or 15 V, and three dual output models offering +5/-5 V, +12/-12 V or +15/-15 V. The converters are fully encapsulated in a compact 1.25 x 0.8 inch (31.7 x 20.3 mm) metal case and have a height of just 0.4 inch (10.2 mm). They are ideal for ruggedized applications involving harsh environments.

#### AT A GLANCE

#### **Total Power**

6 Watts

### **Input Voltage**

12 V, 24 V or 48 V

#### # of Outputs:

Single, Dual

#### **SPECIAL FEATURES**

- Encapsulated
- Wide 4:1 input range
- 1.25" x 0.8" DIP package
- 1500 Vdc I/O isolation
- Single and Dual output
- Vibration meets Mil-STD-202G

#### **SAFETY**

- UL/CSA 62368-1
- CE Mark

# **ELECTRICAL SPECIFICATIONS**

Input				
Input range	9 to 36 Vdc; 18 to 75 Vdc			
Efficiency	81% @ 5 Vo (Vin = nom; lout = lout max; Ambient temperature = 25 °C)			
Output				
Voltage tolerance	±2.0%			
Line regulation	±0.5%			
Load regulation	Single output: 1% @ 3.3 Vo Other: ±0.5% Dual output: ±3.0%			
Noise/ripple	3.3 Vo, 5 Vo: 100 mV 12 Vo: 120 mV 15 Vo: 150 mV			
Short circuit protection	Auto-restart			
Switching frequency	200 KHz			
Temperature coefficient	±0.02 / °C			
Isolation				
I/O isolation	1500 VDC min.			
Insulation resistance	10 Mohm			
Insulation capacitance	1000 pF			

# **ENVIRONMENTAL SPECIFICATIONS**

Operating ambient temperature range	-40°C to +71°C (no derating)	
Storage temperature	-55°C to +105°C	
Humidity	5% to 95% (non-condensing)	
MTBF	1 Mhrs demonstrated MTBF	
RoHS 6 compliant	Yes	




## **ORDERING INFORMATION**

Model Number	Input Voltage	Output 1 Voltage	Output 2 Voltage	Maximum Power
ASA01F18-LS	9 - 3 6 V	3.3 V @ 1.2 A		3.96 W
ASA01A18-LS	9 - 3 6 V	5 V @ 1.00 A		5 W
ASA00B18-LS	9 - 3 6 V	12 V @ 0.50 A		6 W
ASA00C18-LS	9 - 3 6 V	15 V @ 0.40 A		6 W
ASA00AA18-LS	9 - 3 6 V	5 V @ 0.50 A	-5 V @ 0.5 A	5 W
ASA00BB18-LS	9 - 3 6 V	12 V @ 0.25 A	-12 V @ 0.25 A	6 W
ASA00CC18-LS	9 - 3 6 V	15 V @ 0.20 A	-15 V @ 0.20 A	6 W
ASA01F36-LS	18 - 75 V	3.3 V @ 1.2 A		3.96 W
ASA01A36-LS	18 - 75 V	5 V @ 1.00 A		5 W
ASA00B36-LS	18 - 75 V	12 V @ 0.50 A		6 W
ASA00C36-LS	18 - 75 V	15 V @ 0.40 A		6 W
ASA00AA36-LS	18 - 75 V	5 V @ 0.50 A	-5 V @ 0.5 A	5 W
AEE00BB36-LS	18 - 75 V	12 V @ 0.25 A	-12 V @ 0.25 A	6 W
ASA00CC36-LS	18 - 75 V	15 V @ 0.20 A	-15 V @ 0.20 A	6 W

Please contact Artesyn Embedded Power for information on other output voltages, power ranges and configurations. Available in RoHS 6 version only.


# **MECHANICAL DRAWINGS**

# **Single Output**

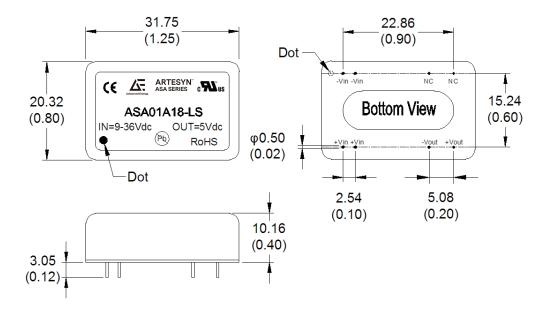

## **MECHANICAL DRAWINGS**

## **Dual Output**

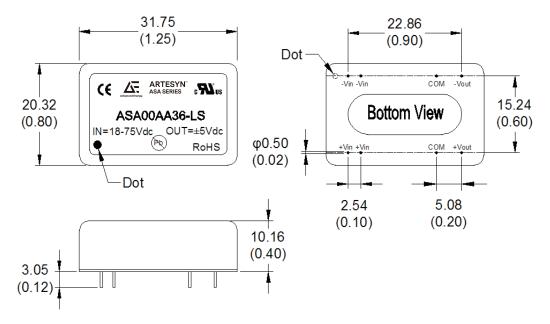

#### Notes

- 1. All specifications are subject to change without notice. Mechanical drawings are for reference only.
- 2. Warranty: 1 yr
- 3. Label and logo appearance may vary from what is shown on mechanical drawings.



#### **ABOUT ADVANCED ENERGY**

Advanced Energy (AE) has devoted more than three decades to perfecting power for its global customers. AE designs and manufactures highly engineered, precision power conversion, measurement and control solutions for mission-critical applications and processes.

Our products enable customer innovation in complex applications for a wide range of industries including semiconductor equipment, industrial, manufacturing, telecommunications, data center computing, and medical. With deep applications know-how and responsive service and support across the globe, we build collaborative partnerships to meet rapid technological developments, propel growth for our customers, and innovate the future of power.

## PRECISION | POWER | PERFORMANCE

Specifications are subject to change without notice. Not responsible for errors or omissions. ©2023 Advanced Energy Industries, Inc. All rights reserved. Advanced Energy®, AE® and Artesyn™ are U.S. trademarks of Advanced Energy Industries, Inc.



For international contact information, visit advancedenergy.com.

powersales@aei.com (Sales Support) productsupport.ep@aei.com (Technical Support) +1 888 412 7832